
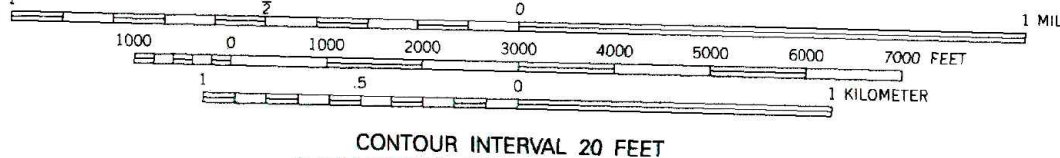


Produced by the United States Geological Survey
Control by USGS and NOS/NOAA
Compiled from aerial photographs taken 1959. Revised from aerial photographs taken 1988. Field checked 1990. Map edited 1992
Underwater contours by USCE
Selected hydrographic data compiled from NOS/NOAA Chart 6164 (1960)
This information is not intended for navigational purposes
North American Datum of 1927 (NAD 27). Projection and 10,000-foot grid ticks: Washington Coordinate System, south zone (Lambert Conformal Conic) and Oregon Coordinate System, north zone. 1000-meter Universal Transverse Mercator grid, zone 11
The difference between NAD 27 and North American Datum of 1983 (NAD 83) for 7.5 minute intersections is given in USGS Bulletin 1875. The NAD 83 is shown by dashed corner ticks
Fine red dashed lines indicate selected fence lines

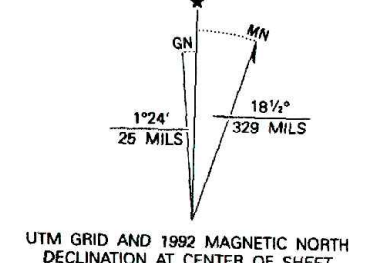

CONTOUR INTERVAL 20 FEET
SUPPLEMENTARY CONTOUR INTERVAL 10 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
DEPTH CURVES AND SOUNDINGS IN FEET-DATUM IS NORMAL POOL ELEVATION 340 FEET

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION
Heavy-duty ——— Light-duty ———
Medium-duty ——— Unimproved dirt ———
U.S. Route

WALLULA, WASH.-OREG.
46118-A8-TF-024