



# Gold Beach OREGON

1:100 000-scale metric  
topographic-bathymetric map

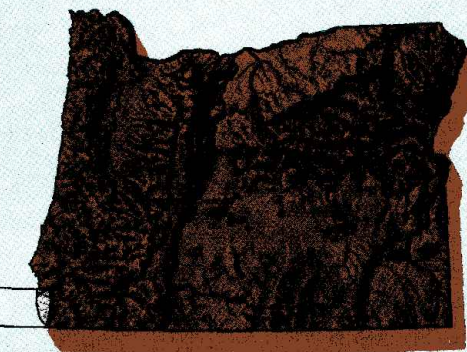

30 X 60 MINUTE QUADRANGLE  
SHOWING

- Contours and elevations in meters
- Highways, roads and other manmade structures
- Water features
- Woodland areas
- Geographic names
- Bathymetric contours in meters



1993

Produced by the United States Geological Survey and the National Ocean Service  
 Compiled from USGS 1:250 000-scale topographic maps dated 1985-1989. Features revised from aerial photographs taken 1988 and other source data. Revised information not field checked.  
 Map edited 1993.

Bathymetry compiled by the National Ocean Service from tide-coordinated bathymetric surveys. This information is not intended for navigational purposes. Mean lower low water (dotted) line and mean high water (heavy solid) line compiled by NOS from tide-coordinated soundings. Apparent shoreline (outer edge of vegetation) shown by light solid line. 1927 North American Datum (NAD 27). Projection and 50 000-meter grid: Universal Transverse Mercator, zone 10. The difference between NAD 27 and North American Datum of 1983 (NAD 83) is too small to show at this scale. The values of the grid between the datum 7.5-minute intersections are given in USGS Bulletin 1875.  
 Offshore projection survey data, shown in red, furnished by the Minerals Management Service. Heavy lines indicate limits of Outer Continental Shelf Official Protraction Diagram dated 1976. The projections on this map are not for Federal listing purposes. For such purposes, refer from the Minerals Management Service.  
 There may be private landholdings within the boundaries of the National or State reservations shown on this map.

CONTOUR INTERVAL: 50 METERS  
 NATIONAL GEODESIC SURVEY SYSTEM OF 1929 ELEVATIONS SHOWN TO THE NEAREST METER  
 BATHYMETRIC CONTOUR INTERVALS: 10 METERS TO 200 METER DEPTH; SUPPLEMENTED BY 2 METER INTERVALS, THENCE 50 METERS TO MAXIMUM DEPTHS, SUPPLEMENTED BY 10 METER INTERVALS, EXCEPT IN NEAR LOWER LOW WATER. THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE  
 BASE MAP COMPARED WITH NATIONAL MAP ACCURACY STANDARDS  
 BATHYMETRIC SURVEY DATA COMPARES WITH INTERNATIONAL TOPOGRAPHIC ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS AND/OR STANDARDS USED AT THE DATE OF THE SURVEY


Meters	Feet	CONVERSION TABLE	DECLINATION DIAGRAM	ADJOINING MAPS
1	3.2808			1 Port Orford
2	6.5615			2 Cannonville
3	9.8423			3 Grants Pass
4	13.1230			4 Happy Camp
5	16.4038			
6	19.6846			
7	22.9654			
8	26.2462			
9	29.5270			
10	32.8078			

FOR SALE BY U.S. GEOLOGICAL SURVEY  
 DENVER, COLORADO 80225, OR RESTON, VIRGINIA 20192  
 AND NATIONAL OCEAN SERVICE, ROCKVILLE, MARYLAND 20852

### Topographic Map Symbols

- Primary highway, hard surface
- Secondary highway, hard surface
- Light duty road, principal street, hard or improved surface
- Other road or street, walk
- Route marker: Interstate, U.S., State
- Railroad: standard gage; narrow gage
- Bridge: overpass; underpass
- Tunnel: road; railroad
- Build-up area: locality, elevation
- Airport: landing field; landing strip
- National boundary
- State boundary
- County boundary
- National or State reservation boundary
- Land grant boundary
- U.S. public lands survey: range, township, section
- Range, township, section line: generated
- Power transmission line; pipeline
- Dam; dam with lock
- Cemetery; building
- Worship: roof; spire
- Mine shaft: adit or cave; mine, quarry; gravel pit
- Campground; picnic area; U.S. location monument
- Ruin; cliff dwelling
- Disturbed surface: strip mine; lava, sand
- Contour: index; intermediate; supplementary
- Bathymetric contours: index; intermediate
- Stream, lake: perennial; intermittent
- Reefs, levee and small, lake, levee and small
- Area to be submerged; marsh, swamp
- Land subject to controlled inundation: woodland
- Sand; mangrove
- Obstacle; viaduct

A pamphlet describing topographic maps is available on request

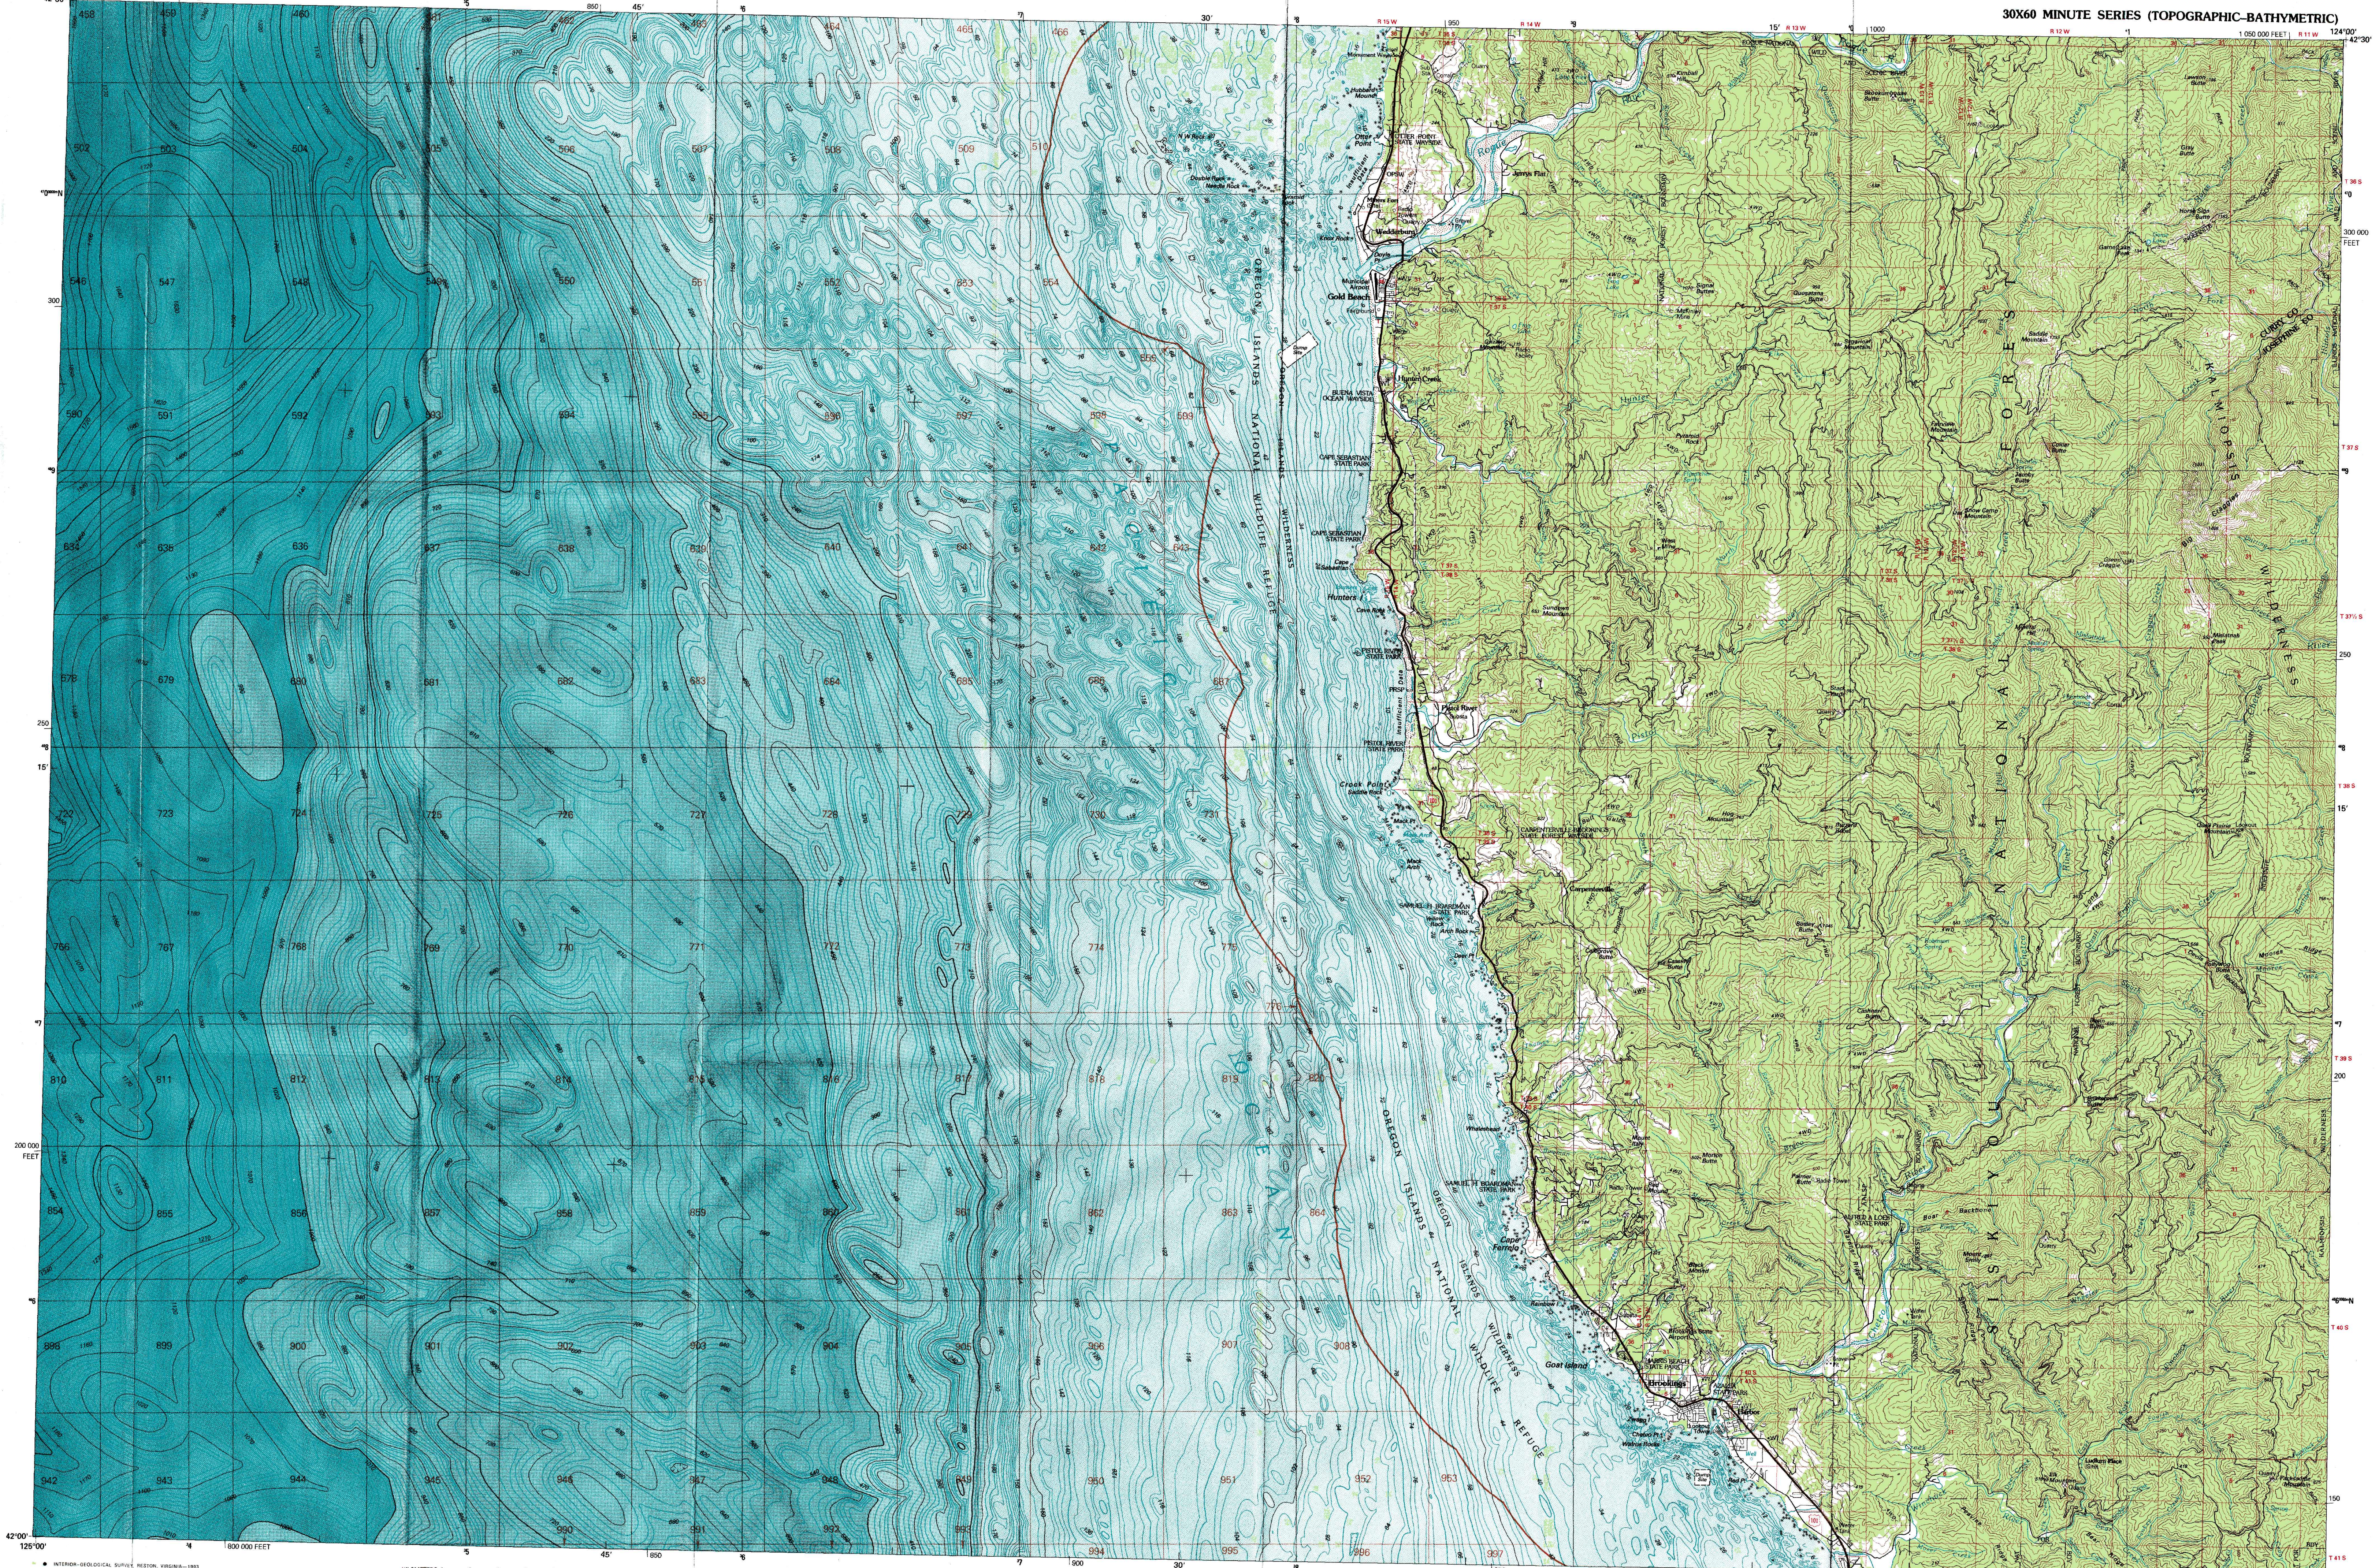

SCALE 1:100 000  
 1 CENTIMETER ON MAP REPRESENTS 1 KILOMETER ON THE GROUND  
 CONTOUR INTERVAL 50 METERS